
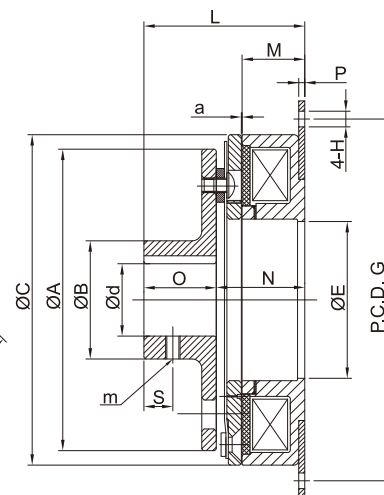


CI1 Series

乾式單板超薄型電磁煞車器 Electromagnetic Power-Applied Friction Brake

附導座 with long hub

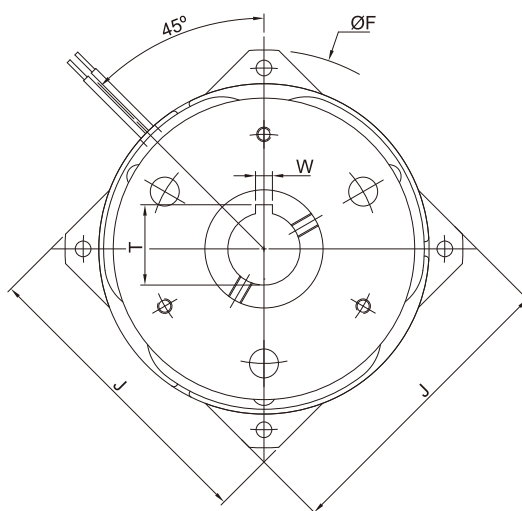

型號 MODEL		CI10S6AA(AB)	CI11S5AA(AB)	CI12S5AA(AB)	CI100S5AA(AB)	CI1010AA(AB)	CI1020AA(AB)
靜摩擦轉距 [N · m] Static Friction Torque		5.5	11	22	45	90	175
動摩擦轉距 [N · m] Dynamic Friction Torque		5.0	10	20	40	80	160
功率 Power [24V](W) at 20°C		14	22	26	29	37	44
外型尺寸 Exterior dimensions	A	63	80	100	125	160	200
	B	27.5	31	41	49	65	83
	C	70	88	110	137	172	215
	d(H7)	15(12)	20(15)	25(20)	30(25)	40(30)	50(40)
	E(+0.1 +0)	35	45	52	65	80	107
	F	90	110	135	165	210	265
	G	80	98	122	150	190	240
	H	4.5	5.5	6.5	6.5	8.5	11
	J	67	82	100	125	160	200
	L	40.2	47.3	54.7	66.7	78	92.3
	M	19	20	21	26	27	31
	N	25.2	27.3	29.7	36.7	40	47.3
	O	15	20	25	30	38	45
	P	2	2	2	2.5	3	3.2
	S	6	8	10	12	14	18
	m	2-M5×150°	2-M5×150°	2-M6×150°	2-M6×150°	2-M8×150°	2-M8×120°
	a	0.2 (±0.05)			0.3 (+0.05 -0.1)		0.4 (±0.1)
	W	5 (4)	5	7 (5)	7	10 (7)	12 (10)
	T	17.3 (13.8)	22.3 (17.3)	28.3 (22.3)	33.3 (28.3)	43.8 (33.3)	53.8 (43.8)
重量 (kg)		0.4	0.7	2.3	2.4	4.3	8.2
保護素子 Protective		07D470K			10D680K	14D680K	